

## DESCRIPTION

### LIGHT FIXTURE:

- Corrosion resistant white finish
- White alabaster glass shade
- Close mount design
- Uses two 13 Watt maximum, GU24 type, fluorescent bulbs. Bulbs included.
- Vent openings in fixture base for exhaust fan
- Light fixture assembly is plug-in and removable

### BLOWER:

- Plug-in permanently lubricated motor
- Polymeric blower wheel

### HOUSING:

- Rugged, 25-gage galvanized steel construction
- Fits in 2" x 6" construction
- Pre-located mounting holes for quick, accurate installation
- Tapered, polymeric duct fitting with built-in backdraft damper for easy, positive duct connection and no metallic clatter

DO NOT install in a tub or shower enclosure.

NOTE: For installation in flat ceilings only.

U.L. Listed for use in insulated ceilings (Type I.C.)

Use supply wiring rated for at least 90° C.

ENERGY STAR® qualified.


## SPECIFICATIONS

| MODEL   | VOLTS | AMPS |
|---------|-------|------|
| 781WHNT | 120   | 0.8  |

| STATIC PRESSURE | CFM | SONES | FAN WATTS | DUCT     |
|-----------------|-----|-------|-----------|----------|
| 0.10            | 100 | 1.5   | 36.4      | 4" Round |
| 0.25            | 88  |       |           |          |




HVI-2100 CERTIFIED RATINGS comply with new testing technologies and procedures prescribed by the Home Ventilating Institute, for off-the-shelf products, as they are available to consumers. Product performance is rated at 0.1 in. static pressure, based on tests conducted in a state-of-the-art test laboratory. Sones are a measure of humanly-perceived loudness, based on laboratory measurements.

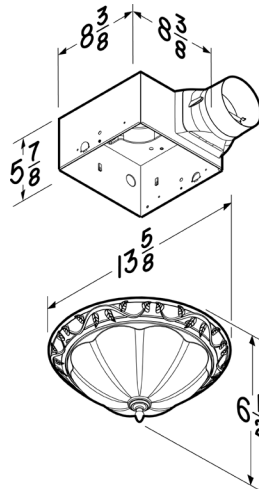

# Decorative Ventilation Fan with Light

## MODEL 781WHNT

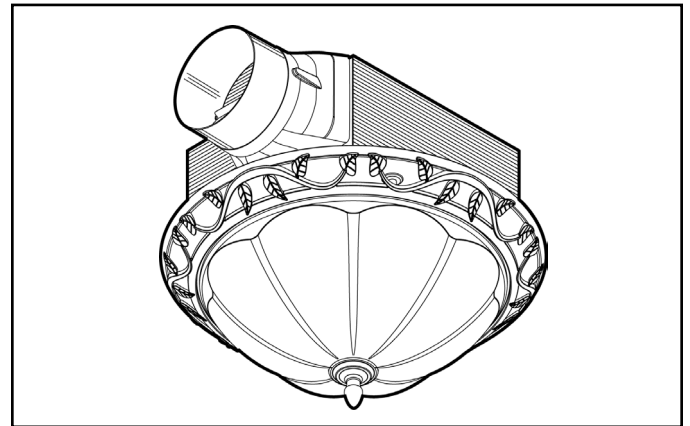

## ARCHITECT'S SPECIFICATION

Decorative Ventilation Fan with Light unit shall be NuTone Model 781WHNT.

Unit shall have galvanized steel housing with integral mounting holes. It shall be ducted to a roof or wall cap.

Blower assembly shall be removable and have a permanently lubricated motor.

Light fixture assembly shall be plug-in, removable and include a white alabaster glass shade and a corrosion-resistant base with white finish.

Lamps shall be two 13 Watt maximum, GU24 type, fluorescent bulbs - included with unit.

Air delivery to be no less than 100 cfm and sound level no greater than 1.5 sones. Air and sound ratings shall be certified by HVI.

Unit shall be U.L. Listed for use in insulated ceilings (Type I.C.)

Unit shall be ENERGY STAR® qualified.

## INSTALLATION

Complete installation instructions are included with each Decorative Ventilation Fan with Light.

Broan-NuTone LLC Hartford, Wisconsin www.nutone.com 888-336-3948

| REFERENCE | QTY. | REMARKS | Project      |
|-----------|------|---------|--------------|
|           |      |         | Location     |
|           |      |         | Architect    |
|           |      |         | Engineer     |
|           |      |         | Contractor   |
|           |      |         | Submitted by |
|           |      |         | Date         |